




TEMPORARY RIVER/LAKE SHORE PROTECTION - COIR LOGS

Created: February 22, 2012

Revised: January 19, 2017

Scale: N.T.S.

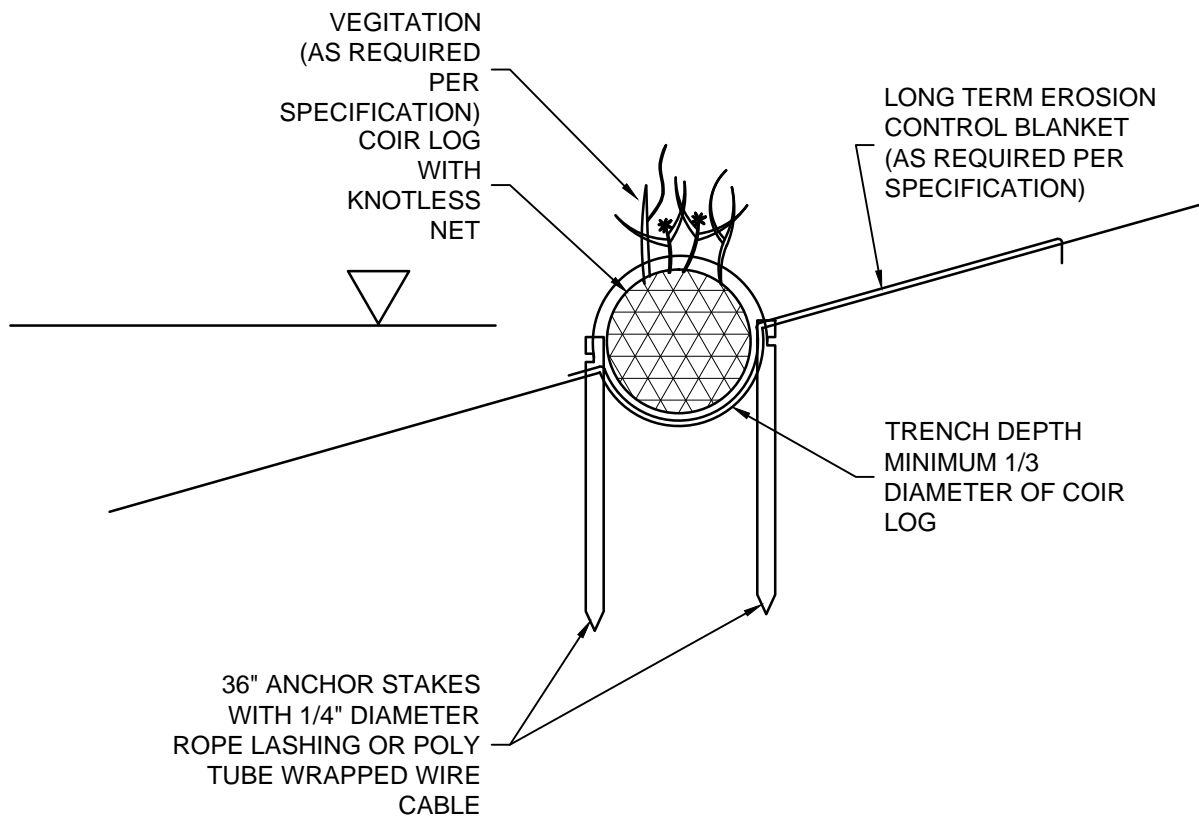

NOTES:

2. POLY TUBE MUST BE USED OVER WIRE CABLE TO PROTECT COIR LOG EXTERIOR NETTING.
3. DUCKBILL, HELICAL, OR OTHER EARTH ANCHORS MUST BE SPACED AT 2'-5' INTERVALS ON CENTER PER MANUFACTURERS RECOMMENDATIONS.