



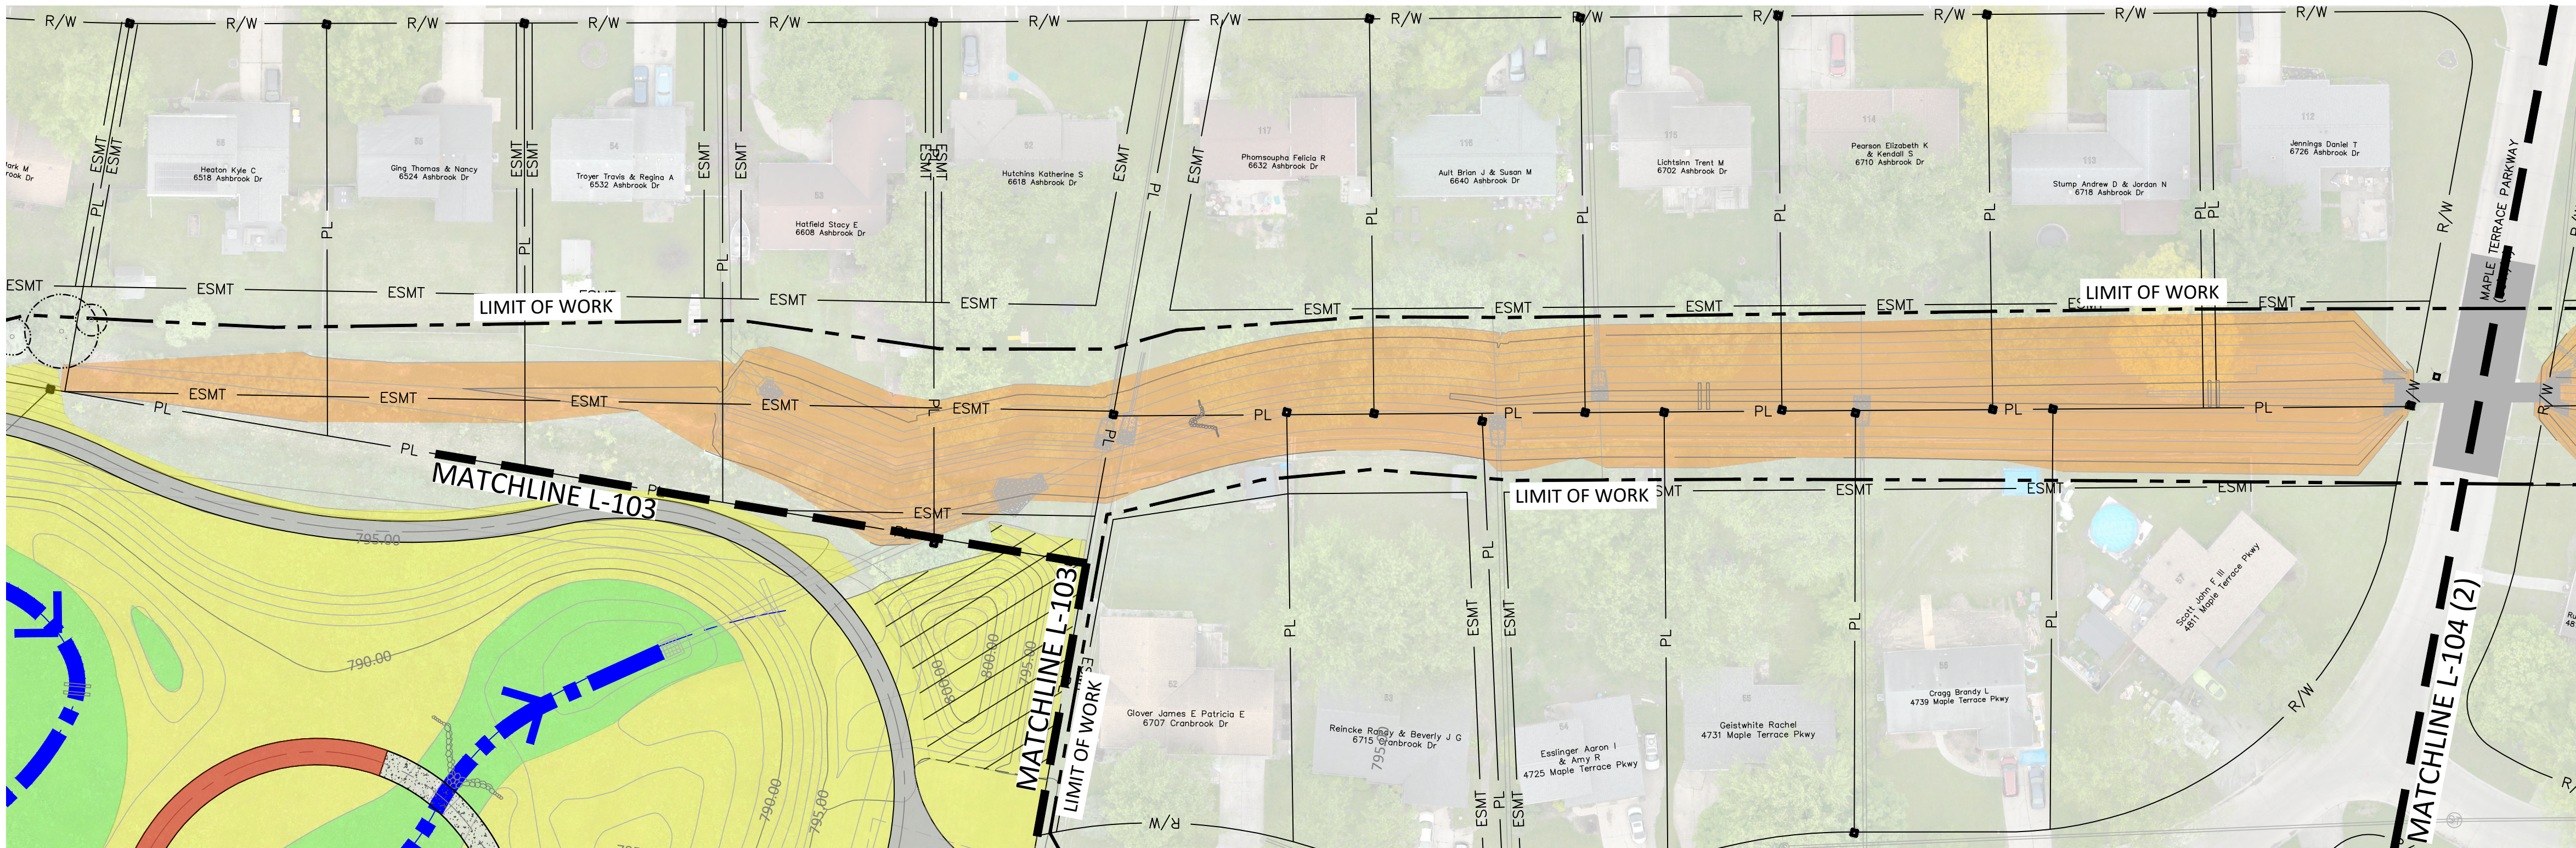

1 DAYLIGHT CHANNEL WEST - PROPOSED SOILS PLAN
1" = 40'-0"

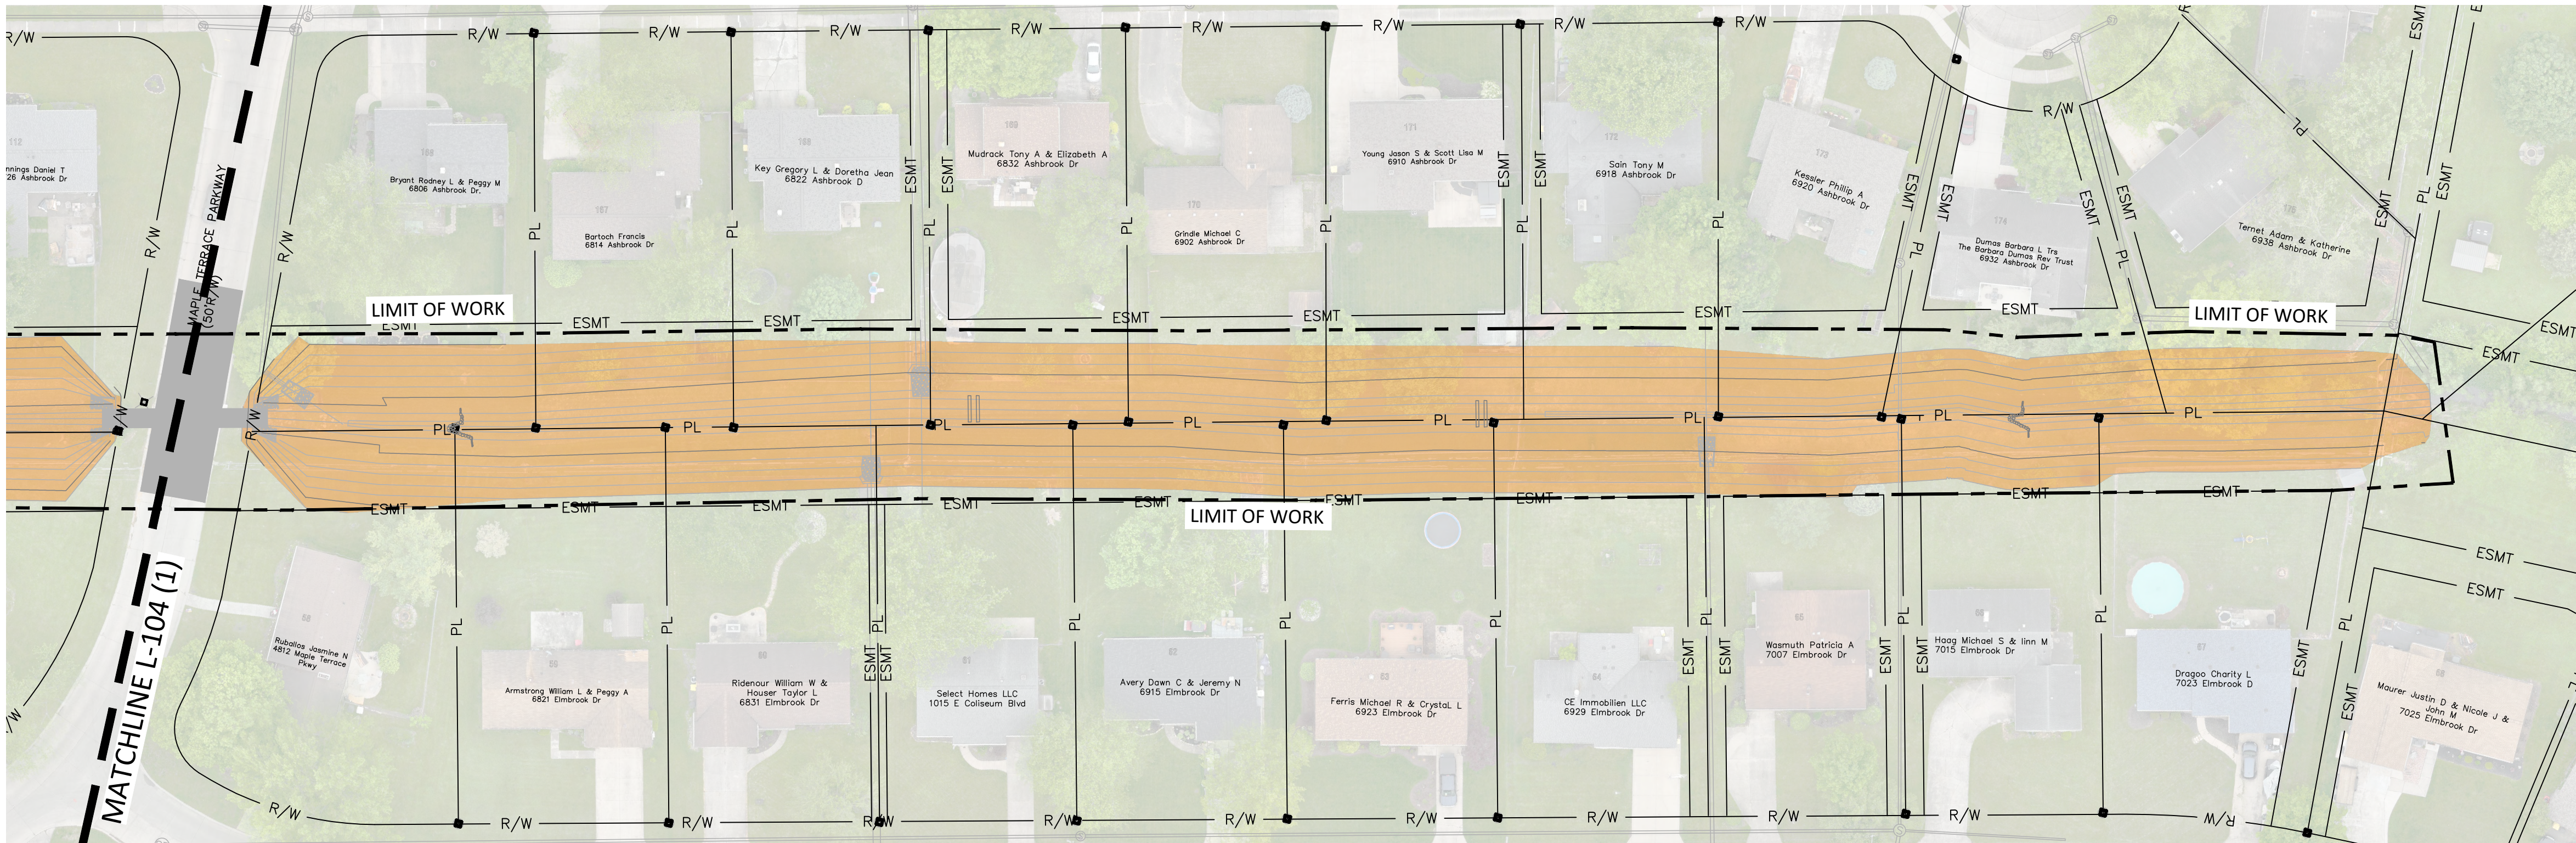

2 DAYLIGHT CHANNEL EAST - PROPOSED SOILS PLAN
1" = 40'-0"

STOCKPILED SOILS

SYMB.	SOIL TYPE	EST. STOCKPILED QUANTITY (CY)	EST. QUANTITY INSTALLED (CY)
	STOCKPILED WETLAND SOIL (SW)	965 CY	900 CY
	STOCKPILED TOPSOIL (ST)	3,572 CY	3,500 CY
	STOCKPILED SUBSOIL (SS)	63,000 CY	25,000 CY
	STOCKPILED MAINTENANCE TRAIL SOIL (MT)		400 CY
	STOCKPILED DAYLIGHT CHANNEL SOILS (DC)	1,111 CY	1050 CY

PROPOSED SOILS NOTES:

1. PROPOSED SOILS PLAN ILLUSTRATES LOCATION FOR EACH TYPE OF STOCKPILED SOIL TO BE PLACED IN THE PROJECT AREA.
2. STOCKPILED WETLAND SOIL (SW) SHALL BE PLACED AT 6" DEPTH WITHIN BANKFULL LOCATIONS AND DEPRESSIONS SHOWN IN THE PLAN.
3. STOCKPILED TOPSOIL (ST) SHALL BE PLACED AT 4" DEPTH ON BASIN PERIMETER SLOPES AS SHOWN.
4. STOCKPILED SUBSOIL (SS) SHALL BE PLACED AT BERM LOCATIONS AS SHOWN. PLACE SUBSOIL IN 8" LIFTS UNTIL PROPOSED SUBGRADE ELEVATION IS REACHED. COMPACT EACH LIFT PRIOR TO INSTALLING NEXT LIFT. BERM SUBGRADE ELEVATION SHALL BE 4" BELOW FINISHED GRADE, TYPICAL.

PLANS DRAWN BY:

111 W. BERRY ST., 4TH FL.
FORT WAYNE, INDIANA 46802
Phone: (317) 442-0400
Fax: (317) 442-0401

FTW BULLERMAN DRAIN DAYLIGHTING
AND STORMWATER DETENTION

PREPARED FOR:
FORT WAYNE
CITY UTILITIES ENGINEERING
CITIZENS SQUARE
200 E. BERRY ST., STE 250
FORT WAYNE, IN 46802

95% PLANS
NOT FOR
CONSTRUCTION

NO.	DATE	DESCRIPTION

W.O. NO: XXXXX

DWG NO: L-106

SURVEYED BY: GAI

DRAWN BY: E. ELLIS

DESIGNED BY: N. HUNTER

CHECKED BY: C. BROOKS

APPROVED BY: C. BROOKS

DATE: 05/23/2025

SHEET TITLE:
DAYLIGHT CHANNEL
PROPOSED SOILS
PLAN

L-106
SHEET 35 OF 59