





# STORM CASTING ADJUSTMENT

Created: January 1, 2002

Revised: August 5, 2014

Scale: N.T.S.

Approved: January 1, 2002

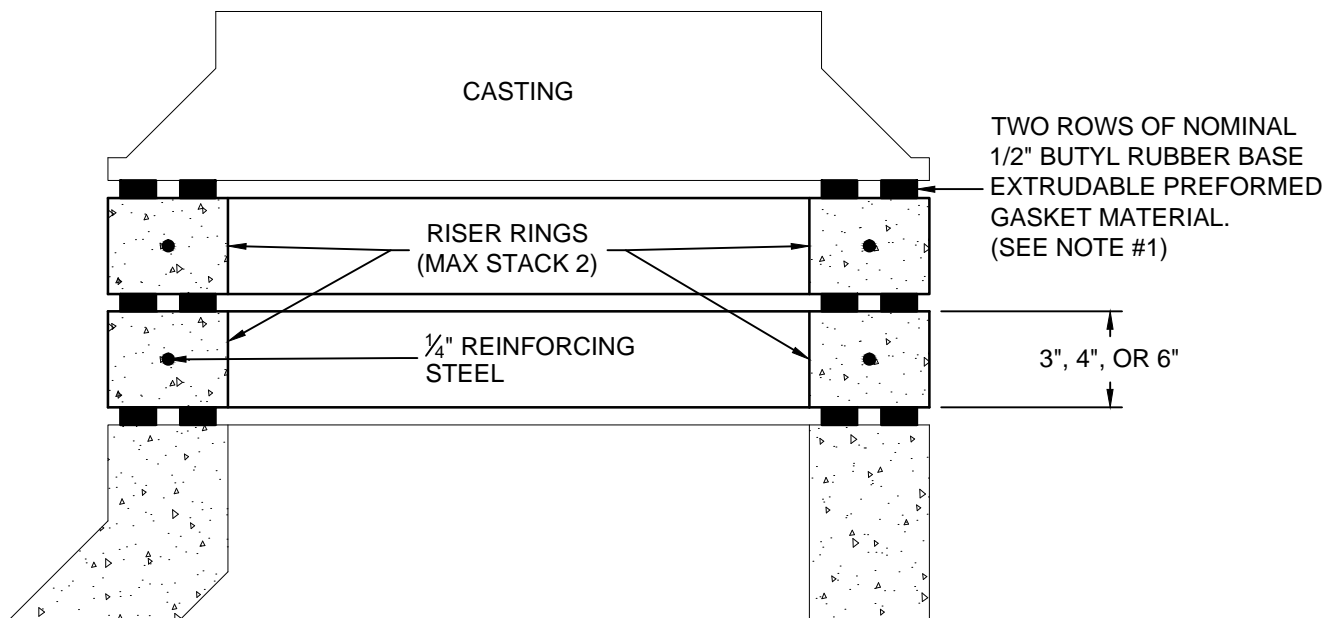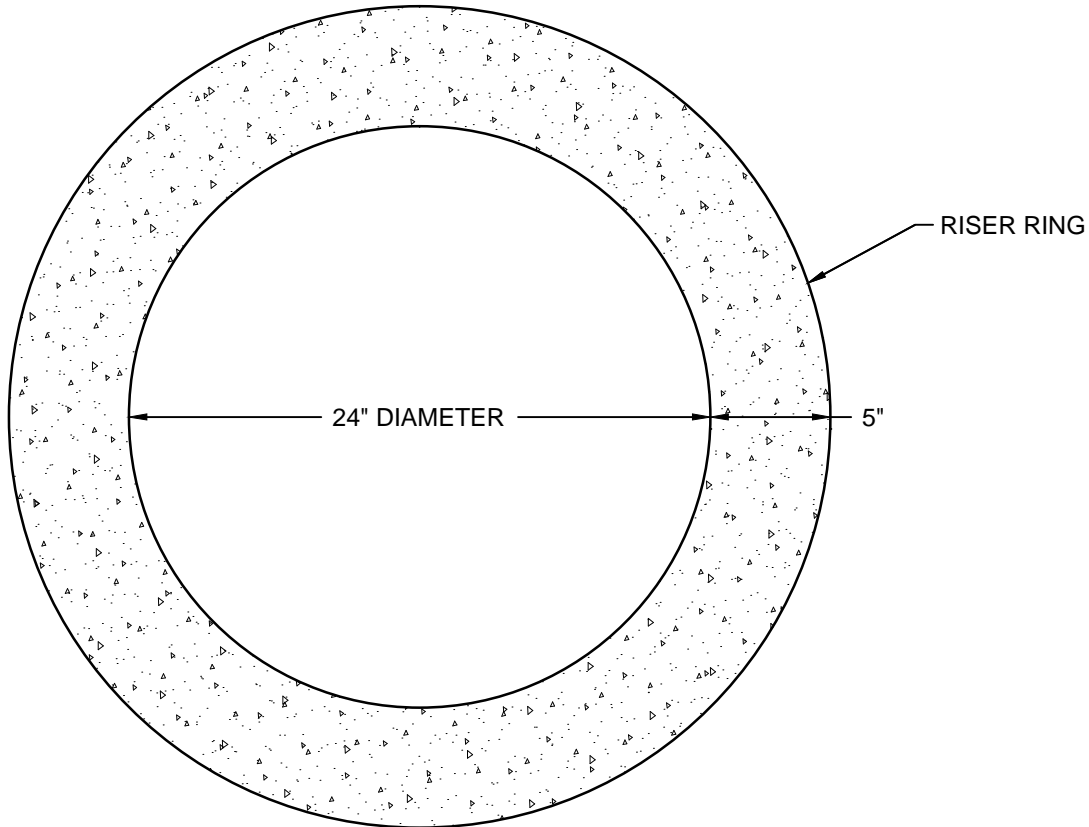

**NOTES:**

1. USE RU 106 RUB'RNEK LTM AS MANUFACTURED BY HENRY CO., KENT-SEAL NO. 2 AS MANUFACTURED BY HAMILTON-KENT OR EZ-STICK BUTYL-RUBBER-BASED PREFORMED FLEXIBLE SEALANT AS MANUFACTURED BY PRESS-SEAL.
2. MINIMUM 4,500 PSI CONCRETE SHALL BE USED FOR RISER RINGS, ALTERNATE PRODUCTS MAY BE USED WITH PRIOR APPROVAL FROM THE CITY UTILITIES PROJECT ENGINEER.