

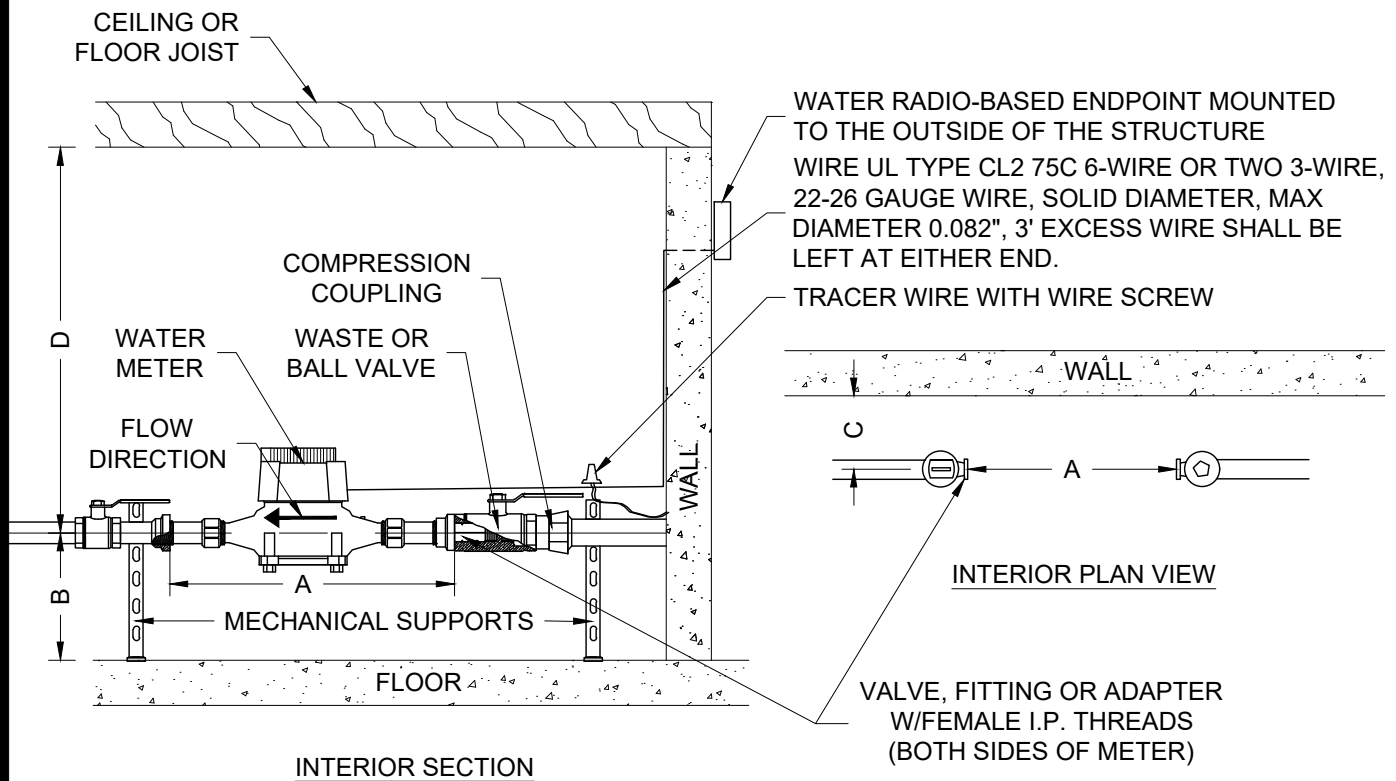


EXHIBIT W6-1 SMALL WATER METER SPACING (SIZES 5/8" X 3/4", AND 1")

Created: January 1, 2002

Revised: May 5, 2022

Scale: N.T.S.



- "A" = SPACE REQUIRED FOR METER AND METER YOKE
- "B" = SPACE REQUIRED FROM ϵ OF PIPING TO FLOOR OR OBSTRUCTION BELOW METER
- "C" = MINIMUM DISTANCE FROM ϵ OF PIPING TO WALL OR OBSTRUCTION BEHIND METER
- "D" = MINIMUM DISTANCE FROM ϵ OF PIPING TO CEILING OR PERMANENT OBSTRUCTION ABOVE METER

NORMAL PIPE SIZE	METER SIZE	"A"		"B"		"C"	"D"
3/4"	5/8" X 3/4"	11 3/4" MIN.	12" MAX.	6" MIN.	45" MAX.	6" MIN.	32" MIN.
3/4"	3/4"	13 1/4" MIN.	13 1/2" MAX.	6" MIN.	45" MAX.	7" MIN.	32" MIN.
1"	1"	15 1/4" MIN.	15 1/2" MAX.	6" MIN.	45" MAX.	7 1/2" MIN.	32" MIN.

NOTES:

1. NO OBSTRUCTION SHALL BE PLACED IN FRONT OF METER WHICH CANNOT BE MOVED READILY FOR READING, REPAIR, OR REPLACEMENT OF METER.
2. A COMPRESSION STOP AND WASTE VALVE OR BALL VALVE SHALL BE INSTALLED ON INLET SIDE OF METER WHERE SERVICE LINE IS UP TO 1".
3. ALL METERS SHALL BE INSTALLED IN A HORIZONTAL POSITION WITH FACE OF READING DIAL ALSO HORIZONTAL. NO METER SHALL BE TILTED OR INSTALLED IN ANY OTHER POSITION WITHOUT WRITTEN CONSENT OF THE UTILITY.
4. METER SHALL BE LOCATED SUCH THAT IT WILL NOT BE SUBJECTED TO FREEZING OR EXCESSIVE HEAT. NO METER SHALL BE LOCATED IN A CRAWL SPACE, UNDER TRAILERS, WELL PITS OR OTHER UNHEATED AREA.
5. METER SHALL NOT BE LOCATED IN CABINETS, CLOSETS OR OTHER SUCH LOCATIONS WHICH PREVENT READY ACCESS.
6. MECHANICAL SUPPORTS MUST BE USED TO MAKE THE METER SET RIGID.
7. WHERE METER IS TO BE INSTALLED ON A WELL TO METER FOR SEWER USAGE, WELL PLASTIC CAN BE USED.
8. MUST HAVE (COPPER) FEMALE I.P. ADAPTER BEFORE & AFTER METER SET.